

SEGS12A32, SEGS24A32, SEGS48A32, SEGS23A32

Single Low Intensity Obstruction Light



*optional FARADAY CAGE

PHOTOMETRIC STANDARD COMPLIANCE

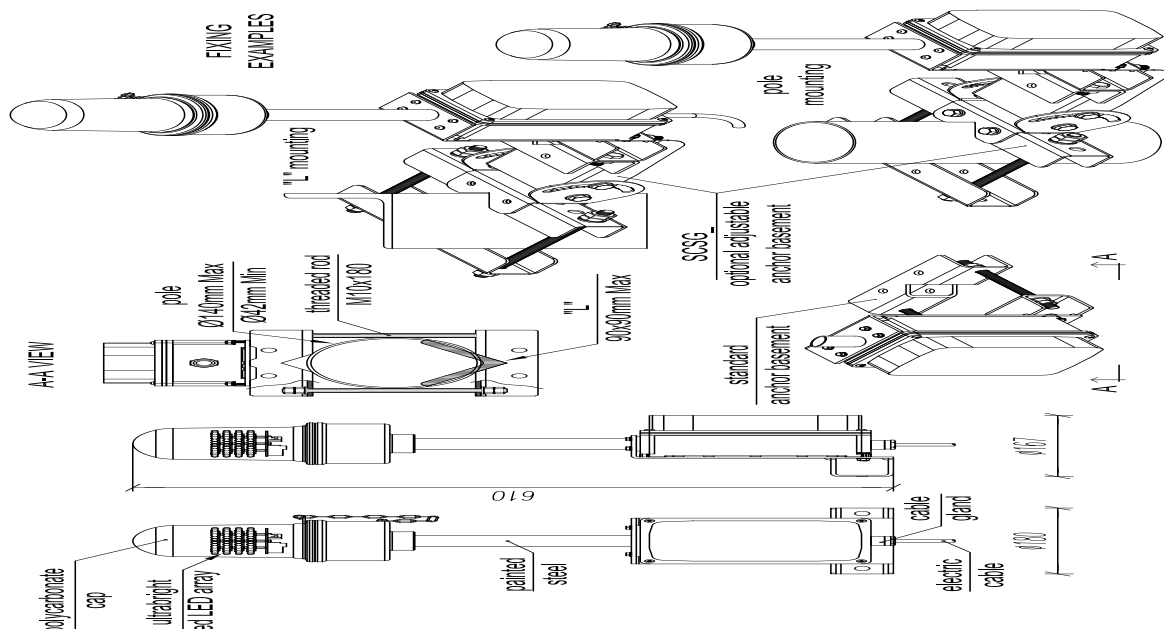
ICAO ANNEX 14, VOLUME I;
TYPE B - LOW INTENSITY OBSTACLE LIGHT;
 CAP 168 – LOW INTENSITY GROUP A.

FAA AC 150/5345-43F
TYPE L-810.
KEY FEATURES & BENEFITS

- designed and manufactured in Italy by Clampco Sistemi
- resistance to corrosion
- easy way for mounting – plug 'n' play connection
- the lowest weight in the market

SPECIFICATIONS

	SEGS12A32	SEGS24A32	SEGS48A32	SEGS23A32
Order Code	Night time			
Typical use	LED			
Light source	Steady			
Type of beacon	Red according to CIE Chromaticity Boundary			
Colour	>32.5 cd			
Light Intensity	360°			
Horizontal coverage	12 Vdc	24 Vdc	48 Vdc	110 – 230 Vac
Input voltage	5 W	5 W	5 W	5 W
Power consumption	100 000 hours			
Average life	from -40 °C to +55 °C			
Temperature range	IP66			
Protection degree	Glass Reinforced Plastic red body (UL94-HB)			
Material of the body	Polycarbonate (UL94-V2)			
Material of the transparent cap	M/F connector IP68 for cable up to ø 9-6 mm			
Connection	3 Kg			
Weight	Stainless steel anchor basement for poles with diameter up to 82 mm.			
Fixing	Mounting hardware for "L" shaped sections (50x50 mm min.; 160x160 mm max.); circular profiles (min. ø = 48,3 mm; max. ø 219.1 mm). Adjustable fixing plate (± 60° on the horizontal plan).			
Special Fixing SCSG_HDGS				

TECHNICAL DRAWINGS


Clampco Sistemi reserves the right to make changes at any time in order to supply the best product possible.